



Shark Cordless Pet Perfect Front Motor Replacement

Replacing the front motor on the Shark Cordless Pet Perfect.

Written By: Ashley Calkins



INTRODUCTION

If you are having a problem with your device's Front motor, Here is a Step by step guide to replace a faulty or broken Front motor.



TOOLS:

- [Phillips #2 Screwdriver](#) (1)
 - [Soldering Station](#) (1)
-

Step 1 — Front Belt



- Remove the two 12mm screws from the front face plate with the PH2 bit from the tool kit.

Step 2




- Once the screws are removed pull the front face plate off. This will allow access to the belt and motor.

Step 3




- Lift the brush roller upwards towards you, and the brush roller should come out along with the belt.

Step 4

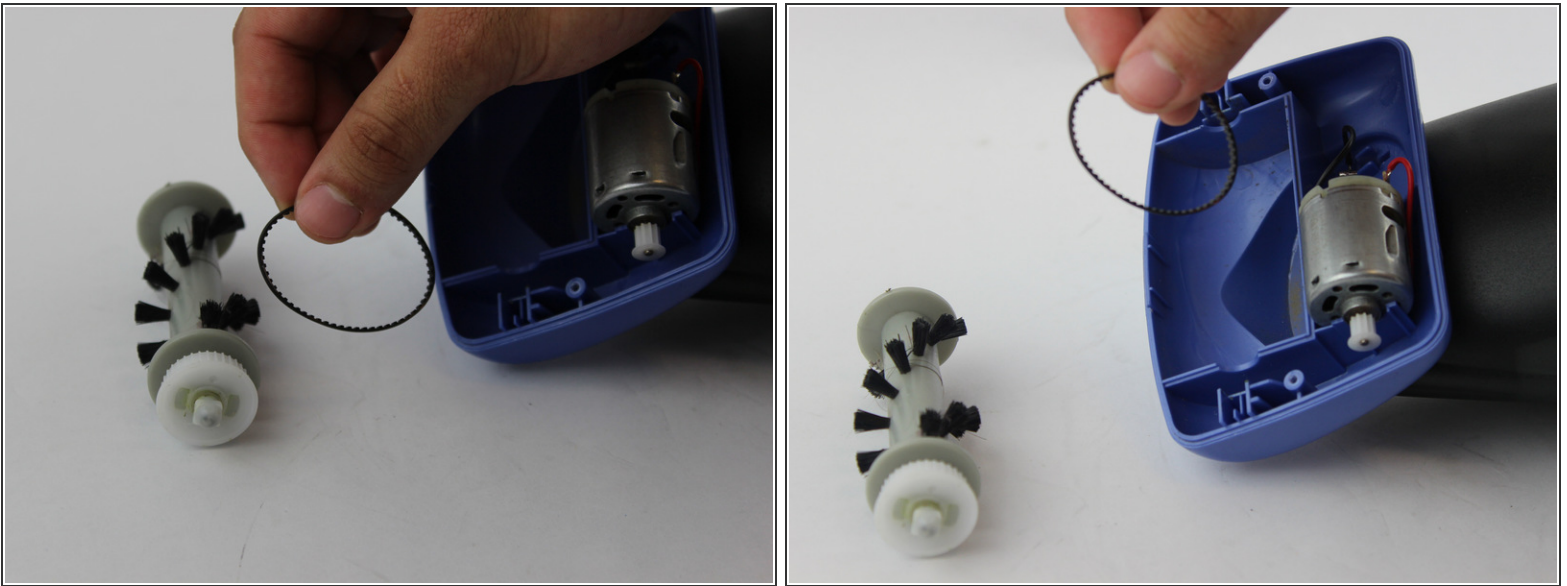

- Remove the belt from the motor mount, and then replace with a new belt.

Step 5 — Front Motor

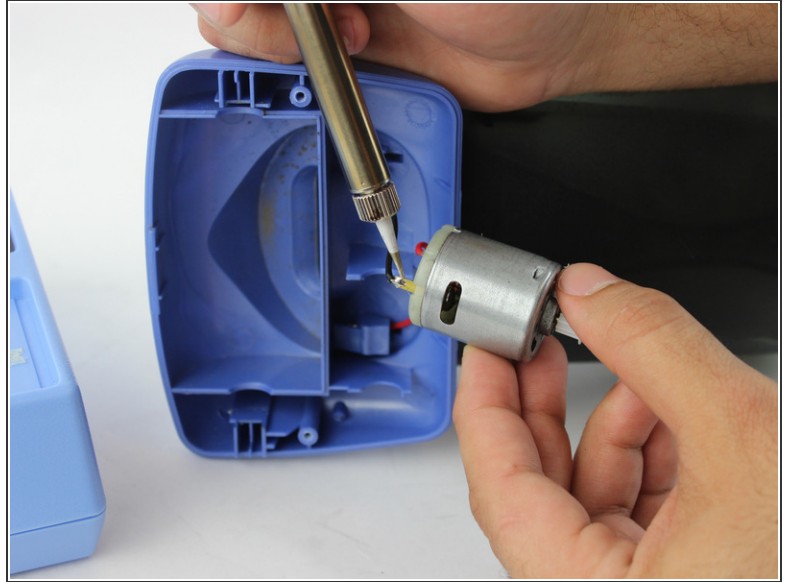

- Remove the solder from both motor terminals.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-19 02:57:51 AM.